
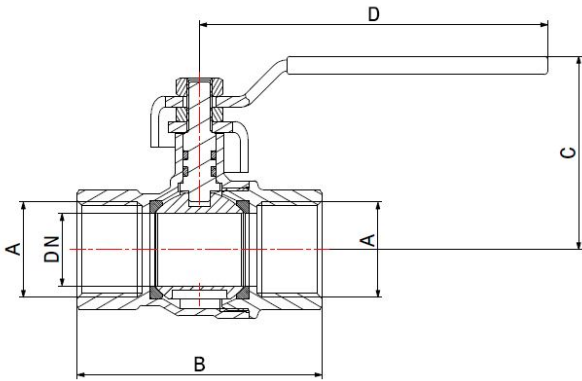


GAS BALL VALVES

MISSOURI

7950A1

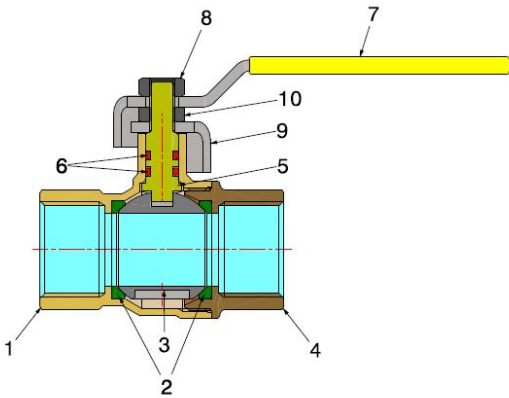

- F/F gas ball valve with iron lever
- Female thread EN 10226-1
- Pressure class MOP 5
- Temperature range min -20°C - max +60°C

Valve produced according to EN331 standard class MOP5, suitable for distributing and interrupting low pressure gases. Plumbing and heating systems and industrial sector are the ideal fields of application. It's a full bore valve and the ball seal is guaranteed by two PTFE seats.

The operating mechanism seal features two VITON® O-Rings with an internally installed stem and anti-ejection system.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Seal	2	Virgin PTFE
3	Ball	1	CW617N UNI-EN 12165 chrome-plated
4	End connection	1	CW617N UNI-EN 12165 nichel-plated
5	Stem	1	CW614N UNI-EN 12164
6	O-Ring	2	Viton®
7	Lever	1	Galvanised iron and PVC coated
8	Nut	1	Galvanised iron
9	Short lever	1	Galvanised iron
10	Nut	1	Brass nickel-plated

DIMENSIONS

DN	A	B	C	D
15	Rp 1/2"	59	48	95
20	Rp 3/4"	68	53	95
25	Rp 1"	80	63	120
32	Rp 1.1/4"	96	70	120
40	Rp 1.1/2"	106	87	150
50	Rp 2"	130	95	150

PACKAGING

	Rp 1/2"	Rp 3/4"	Rp 1"	Rp 1.1/4"	Rp 1.1/2"	Rp 2"
CODE	7950A104	7950A106	7950A108	7950A110	7950A111	7950A113
PCS BOX	12	10	8	-	-	-
PCS CARTON	120	120	72	25	16	8