

BOILER DRAIN VALVES



MALE TAPERED BOILER DRAIN VALVE

3940



- Male tapered boiler drain valve with cap and chain
- Thread ISO 228
- Finishing sandblasted yellow
- Temperature range min-10°C - max +120°C

Valve suitable for interrupting fluids that are generally non-corrosive, compatibly with the valve materials.
Plumbing and heating systems are the ideal fields of application, where this valve is used to discharge heat transfer fluids from the heating system.

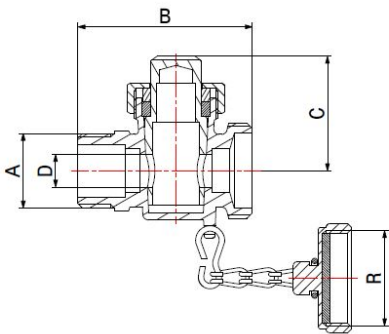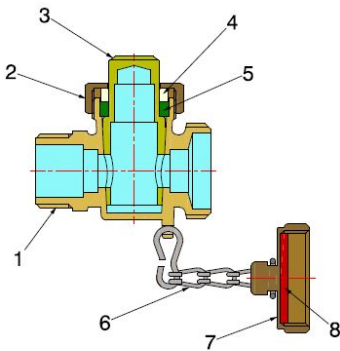

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Nut	1	CW617N UNI-EN 12165
3	Cone	1	CW617N UNI-EN 12164
4	Gland	1	Plastic
5	Gasket	1	SGL Carbon
6	Chain	1	Brassed iron
7	Plug	1	CW617N UNI-EN 12165
8	Plug gasket	1	SBR

DIMENSIONS

DN	A	B	C	D	R	PN
10	3/8"	47	28	8	1/2"	10
15	1/2"	48	32	10	3/4"	10
20	3/4"	60	38	13,5	1"	10

PACKAGING

	3/8"	1/2"	3/4"
CODE	39400003	39400004	39400006
PCS BOX	1	1	1
PCS CARTON	150	150	100