
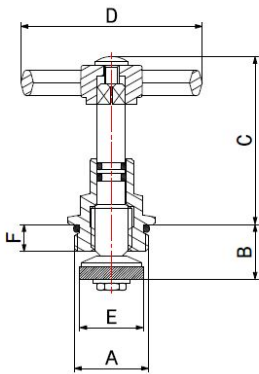


UPPER PARTS

UPPER PART FOR STOP VALVE

7520AXC

- Upper part for stop valve - moving stem
- Male thread ISO 228
- Temperature range min 0°C - max +95°C



COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Upper part body	1	CW617N UNI-EN 12164 - CW617N UNI-EN 12165
2	O-Ring	1	KTW approved EPDM Perox
3	Upper part stem	1	CW617N UNI-EN 12164
4	O-Ring	2	KTW approved EPDM Perox
5	Gasket holder disc	1	CW617N UNI-EN 12164 - CW617N UNI-EN 12165
6	Gasket	1	KTW approved EPDM Perox
7	Nut	1	CW617N UNI-EN 12164
8	Washer	1	CW508L UNI-EN 1652
9	Handwheel	1	Plastic
10	Screw	1	CW508L UNI-EN 12166

DIMENSIONS

A	B min	B max	C min	C max	D	E	F	PN
1/2"	16,5	23	38,5	45	50	17	7,5	16
3/4"	17,5	26	41,5	50	50	22	8,5	16
1"	20	32,5	53,5	64	55	29	10,5	16
1.1/4"	22,5	44,5	70	92	55	37	12	16
1.1/2"	26,5	46	65,5	85	70	42	13	16
2"	25,5	56,5	87	118	70	55	14	16

PACKAGING

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODE	7520A004XC	7520A006XC	7520A008XC	7520A010XC	7520A011XC	7520A013XC
PCS BOX	-	-	-	-	-	-
PCS CARTON	200	150	150	50	40	30