


UPPER PARTS

UPPER PART WITH SPRING

7550XC



- Upper part with spring - fixed stem
- Male thread ISO 228
- Temperature range min 0°C - max +95°C

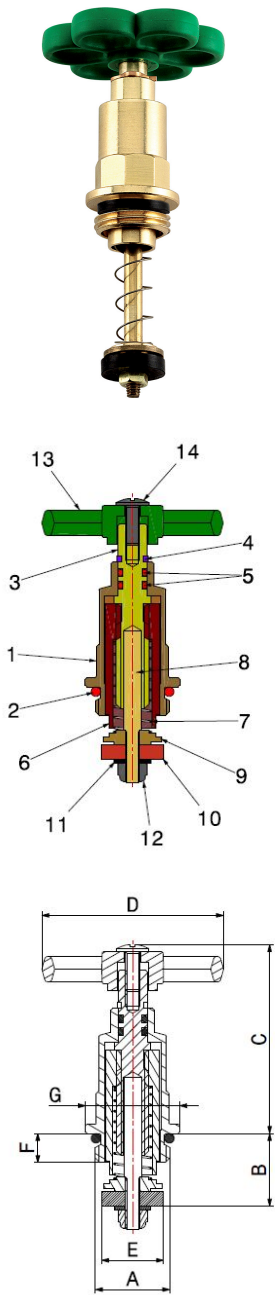

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Upper part body	1	CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (from 1" to 2")
2	O-Ring	1	KTW approved EPDM Perox
3	Upper part stem	1	CW617N UNI-EN 12164
4	Snap ring	1	Phosphorous bronze
5	O-Ring	2	KTW approved EPDM Perox
6	Valve	1	CW617N UNI-EN 12164
7	Spring	1	AISI 302 stainless steel
8	Hose end stem	1	CW617N UNI-EN 12164
9	Gasket holder disc	1	CW617N UNI-EN 12164
10	Gasket	1	KTW approved EPDM Perox
11	Washer	1	CW508L UNI-EN 1652
12	Self-locking nut	1	Brass + Plastic
13	Handwheel	1	Plastic
14	Screw	1	CW508L UNI-EN 12166

DIMENSIONS

A	B min	B max	C	D	E	F	G	PN
1/2"	17	35	53	50	17	8	25,5	16
3/4"	19	43	59	55	22	9	31,5	16
1"	20	52	70	55	29	10,5	39,5	16
1.1/4"	21,5	63	82	70	37	11	49	16
1.1/2"	23	72	87	70	42	12	56	16
2"	26	90	97	70	55	14	68	16

PACKAGING

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODE	75500004XC	75500006XC	75500008XC	75500010XC	75500011XC	75500013XC
PCS BOX	-	-	-	-	-	-
PCS CARTON	250	150	80	60	40	20