
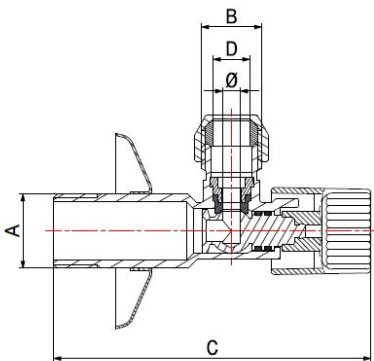


UNDER-BASIN TAPS

UNDER-BASIN TAP

7670

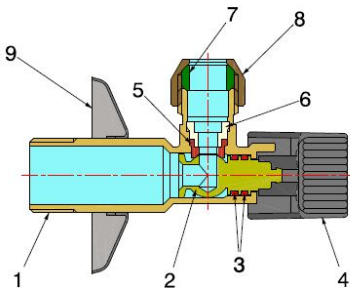

- Under-basin tap
- Male thread ISO 228
- Temperature range min 0°C - max +80°C

Valve suitable for distributing, regulating and interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing and heating systems are the ideal field of application, where it is used as shut-off bibcock before other appliances such as taps, mixers or toilet tanks. The seat tightness is guaranteed by a NBR gasket.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 chrome-plated
2	Stem with ball	1	CW617N UNI-EN 12164
3	O-Ring	2	EPDM Perox
4	Gasket	1	ABS chrome-plated
5	Shaped gasket	1	NBR
6	Snap seal	1	Nylon
7	Ogive	1	PTFE
8	Nut	1	CW617N UNI-EN 12164 chrome-plated
9	Rosette	1	Stainless steel

DIMENSIONS

A	B	C	D	Ø	PN
1/2"	3/8"	87	10	6	10
1/2"	1/2"	87	14	6	10

PACKAGING

	1/2"x3/8"	1/2"x1/2"
CODE	76700603	76700604
PCS BOX	1	1
PCS CARTON	150	150