

PRESSURE REDUCERS

PRESSURE REDUCER

3625



- F/F pressure reducer
- Maximum operating pressure 25 bar
- Temperature range min 0°C – max + 80°C

Reducer suitable for regulating downstream pressure of fluids with a medium-low flow. Plumbing, heating, industrial and agricultural sectors are the ideal fields of application.

The seat tightness is guaranteed by a NBR gasket.


The reducer is pre-calibrated in our factory with an outlet pressure of 3 bar.

The regulation range of the outlet pressure from 1/2" to 1" is 0,5 - 5 bar

The regulation range of the outlet pressure from 1 1/4" to 2" is 1 - 5,5 bar

DIMENSIONS

A	B	C	D
1/2"	70	128	68
3/4"	74	128	68
1"	90	160	80
1".1/4	126	230	92
1".1/2	126	230	92
2"	154	260	110

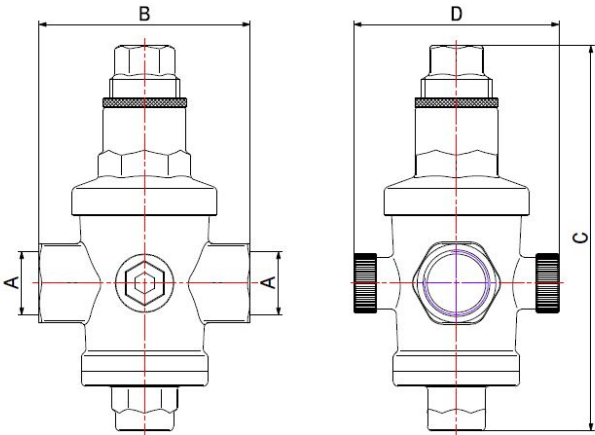

PACKAGING

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODE	36250004	36250006	36250008	36250010	36250011	36250013
PCS BOX	1	1	1	-	-	-
PCS CARTON	20	20	10	10	10	5