MANIFOLDS

PRE-ASSEMBLED MANIFOLD

3729

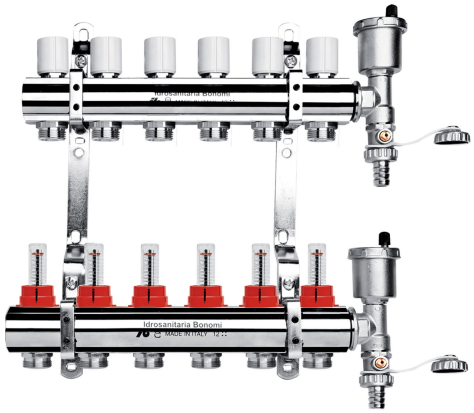

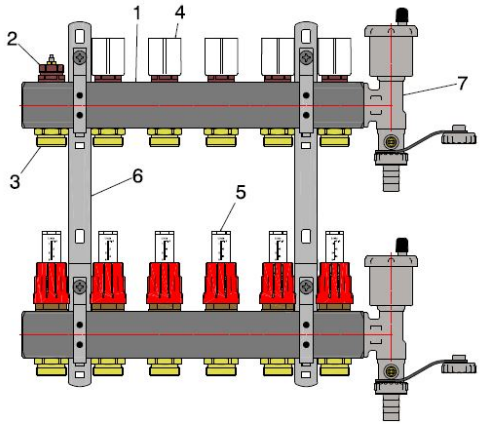

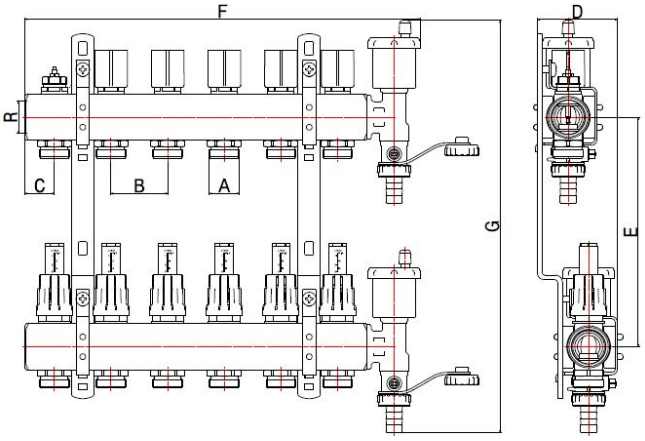

- Pre-assembled manifold from bar
- Finishing nickel
- Thread ISO 228
- Temperature range min 0°C - max + 95°C

Manifold suitable for distributing, interrupting and regulating heat transfer fluids. This preassembled manifold is composed by flowmeters, flow regulators for balancing circuits and shut-off valves suitable for electro-thermal actuators. Both collectors are supplied with automatic air vent terminals and with loading/unloading valves for the system.
Temperature control in every indoor space allows a proper management of heat loads, to considerably improve energy savings and environmental comfort. It should be noted that the unloading terminals are supplied disassembled in separate packaging.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Manifold	1	CW617N UNI-EN 12168 nickel-plated
2	Upper part	1	CW617N UNI-EN 12164 nickel-plated
3	Connector	1	CW617N UNI-EN 12164 nickel-plated
4	Handle	1	ABS plastic
5	Flowmeter	1	–
6	Bracket	1	Galvanised iron
7	Manifold terminal	1	–

DIMENSIONS

N.OF WAY	R	A	B	C	D	E	F	G	PN
3	1"	3/4"	50	26	70	200	200	370	10
4	1"	3/4"	50	26	70	200	250	370	10
5	1"	3/4"	50	26	70	200	300	370	10
6	1"	3/4"	50	26	70	200	350	370	10
7	1"	3/4"	50	26	70	200	400	370	10
8	1"	3/4"	50	26	70	200	450	370	10
9	1"	3/4"	50	26	70	200	500	370	10
10	1"	3/4"	50	26	70	200	550	370	10
11	1"	3/4"	50	26	70	200	600	370	10
12	1"	3/4"	50	26	70	200	650	370	10
13	1"	3/4"	50	26	70	200	700	370	10

PACKAGING

	3 WAY	4 WAY	5 WAY	6 WAY	7 WAY	8 WAY	9 WAY	10 WAY	11 WAY	12 WAY	13 WAY
CODE	**37290308**	**37290408**	**37290508**	**37290608**	**37290708**	**37290808**	**37290908**	**37291008**	**37291108**	**37291208**	**37291308**
PCS BOX	-	-	-	-	-	-	-	-	-	-	-
PCS CARTON	1	1	1	1	1	1	1	1	1	1	1