


MANIFOLDS

# MANIFOLD FROM BAR WITH REGULATING UPPER PARTS

3727

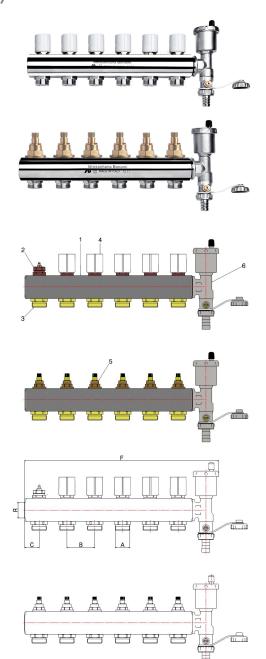

- Pre-assembled bar manifold
- Finishing nickel-plated
- Thread ISO 228

**MANIFOLDS** 

• Temperature range min 0°C - max +95°C

Manifold suitable for distributing, interrupting and regulating heat transfer fluids. This preassembled manifold is composed by manual flow regulators for balancing circuits and shut-off valves suitable for electro-thermal actuators. Both collectors are supplied with automatic air vent terminals and with loading/unloading valves for the system.

Temperature control in every indoor space allows a proper management of heat loads, to considerably improve energy savings and environmental comfort.

It should be noted that the unloading terminals are supplied disassembled in separate packaging.

### COMPONENTS

POS.	PART NAME	MATERIAL
1	Manifold	CW617N UNI-EN 12168 nickel-plated
2	Thermostatic upper part	CW617N UNI-EN 12164 nickel-plated
3	Connector	CW617N UNI-EN 12164 nickel-plated
4	Handle	ABS plastic
5	Upper part	CW617N UNI-EN 12164 nickel-plated
6	Manifold terminal	-

# DIMENSONS

N.OF WAY	R	Α	В	С	F	PN
3	1"	3/4"	50	26	200	10
4	1"	3/4"	50	26	250	10
5	1"	3/4"	50	26	300	10
6	1"	3/4"	50	26	350	10
7	1"	3/4"	50	26	400	10
8	1"	3/4"	50	26	450	10
9	1"	3/4"	50	26	500	10
10	1"	3/4"	50	26	550	10
11	1"	3/4"	50	26	600	10
12	1"	3/4"	50	26	650	10
13	1"	3/4"	50	26	700	10

## PACKAGING

	3 WAY	4 WAY	5 WAY	6 WAY	7 WAY	8 WAY	9 WAY	10 WAY	11 WAY	12 WAY	13 WAY
CODE	37270308	37270408	37270508	37270608	37270708	37270808	37270908	37271008	37271108	37271208	37271308
PCS BOX	-	-	-	-	-	-	-	-	-	-	-
PCS CARTON	3	3	3	3	3	3	3	3	3	3	3