

MANIFOLDS




MANIFOLD WITH VALVES

3735



- Manifold with valves
- Finishing nickel-plated
- M22x1,5 side connections
- Thread ISO 228
- Temperature range min 0°C - max +95°C

Manifold suitable for distributing and interrupting sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application. The seat tightness is guaranteed by a EPDM PEROX seal, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

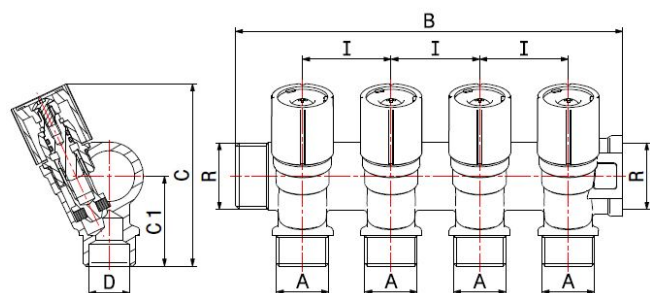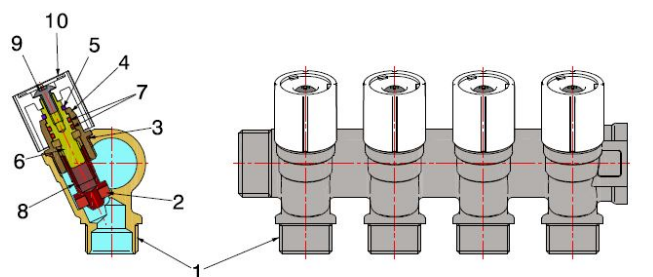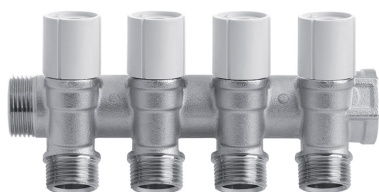

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Gasket	1	EPDM Perox
3	O-Ring	1	EPDM Perox
4	Upper part	1	CW617N UNI-EN 12164
5	Snap ring	1	Phosphorous bronze
6	Stem	1	CW617N UNI-EN 12164
7	Stem O-Ring	2	EPDM Perox
8	Valve	1	CW617N UNI-EN 12164
9	Srew	1	Stainless steel
10	Handle	1	ABS

DIMENSIONS

N. OF WAY	R	A	I	B	C1	C	D	PN
2	3/4"	M22x1,5 35	83	35,5	73	16,1	10	
2	1"	M22x1,5 35	90	36,5	77	16,1	10	
3	3/4"	M22x1,5 35	118	35,5	73	16,1	10	
3	1"	M22x1,5 35	125	36,5	77	16,1	10	
4	3/4"	M22x1,5 35	153	35,5	73	16,1	10	
4	1"	M22x1,5 35	158	36,5	77	16,1	10	
5	3/4"	M22x1,5 35	188	35,5	73	16,1	10	
5	1"	M22x1,5 35	195	36,5	77	16,1	10	

PACKAGING

	2 WAY 3/4"	2 WAY 1"	3 WAY 2/4"	3 WAY 1"	4 WAY 3/4"	4 WAY 1"	5 WAY 3/4"	5 WAY 1"
CODE	37350206W	37350208W	37350306W	37350308W	37350406W	37350408W	37350506W	37350508W
PCS BAG	1	1	1	1	1	1	1	1
PCS CARTON	50	50	50	50	40	40	25	25