

MANIFOLDS



MANIFOLDS WITH VALVES
AND ADAPTORS

3725



- Manifold with valves and D.16 adaptors for PEX-AL-PEX pipe
- Finishing nickel-plated
- Threads ISO 228
- M22x1,5 side connections
- Temperature range min 0°C - max +95°C

Manifold particularly suitable for distributing and interrupting sanitary or thermal fluids. Plumbing and heating systems and industrial sector are the ideal fields of application. The seat tightness is guaranteed by a EPDM PEROX seal, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

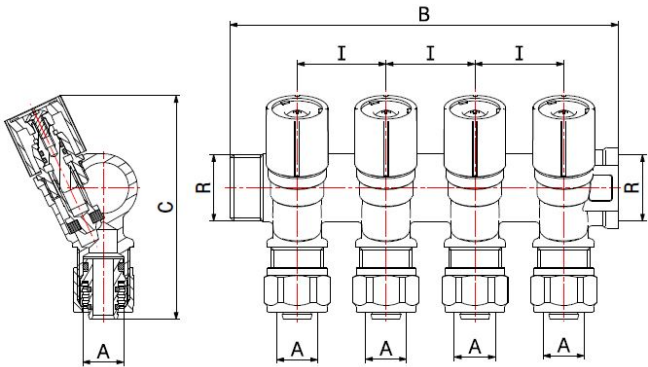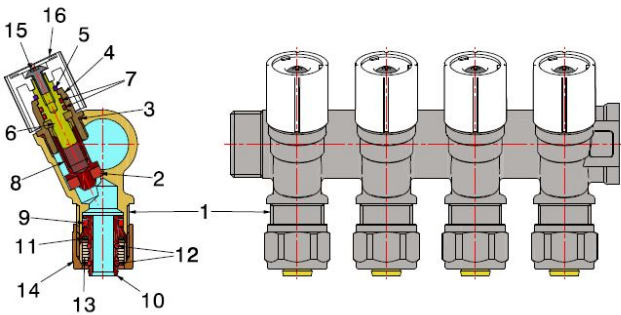

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165 nickel-plated
2	Seal	1	EPDM Perox
3	O-Ring	1	EPDM Perox
4	Upper part	1	CW614N UNI-EN 12164
5	Snap ring	1	Bronze CC491K UNI-EN 1982:200
6	Stem	1	CW614N UNI-EN 12164
7	Stem O-Ring	2	EPDM Perox
8	Valve	1	CW614N UNI-EN 12164
9	O-Ring	1	EPDM Perox
10	Hose-end pipe	1	CW614N UNI-EN 12164
11	Seal	1	PTFE
12	O-Ring	2	EPDM Perox
13	Ogive	1	CW614N UNI-EN 12164
14	Nut	1	CW614N UNI-EN 12164 nickel-plated
15	Screw	1	Stainless steel
16	Handle	1	Plastic

DIMENSIONS

N. OF WAY	R	A	I	B
2	3/4"	16x2	35	83
3	3/4"	16x2	35	118
4	3/4"	16x2	35	153

PACKAGING

	2 WAY 3/4"	3 WAY 3/4"	4 WAY 3/4"
CODE	37250206W16	37250306W16	37250406W16
PCS BAG	1	1	1
PCS CARTON	50	50	40