

COMPRESSION FITTINGS FOR PEX-AL-PEX PIPES


**FEMALE ELBOW FITTING**

3954




- Female flanged elbow compression fitting
- Thread EN 10226-1
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, HVAC, air-conditioning and distribution of drinking water. The fitting features an external clamping nut to ensure a perfect crimping to the pipe and an excellent resistance to external stress.



**COMPONENTS**

| POS. | PART NAME | N° | MATERIAL                          |
|------|-----------|----|-----------------------------------|
| 1    | Fitting   | 1  | CW617N UNI-EN 12165 nickel-plated |
| 2    | O-Ring    | 2  | EPDM Perox                        |
| 3    | Washer    | 1  | PTFE                              |
| 4    | Ogive     | 1  | CW617N UNI-EN 12164               |
| 5    | Nut       | 1  | CW617N UNI-EN 12165 nickel-plated |

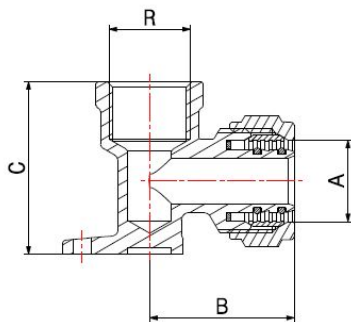

**DIMENSIONS**

| A    | R    | B  | C  |
|------|------|----|----|
| 16x2 | 1/2" | 32 | 41 |
| 16x2 | 3/4" | 37 | 45 |
| 18x2 | 1/2" | 37 | 47 |
| 18x2 | 3/4" | 39 | 50 |
| 20x2 | 1/2" | 37 | 44 |

**PACKAGING**

|             | 16 - 1/2"       | 16 - 3/4"       | 18 - 1/2"       | 18 - 3/4"       | 20 - 1/2"       |
|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>CODE</b> | <b>39541604</b> | <b>39541606</b> | <b>39541804</b> | <b>39541806</b> | <b>39542004</b> |
| PCS BAG     | 10              | 5               | 10              | 5               | 10              |
| PCS CARTON  | 100             | 70              | 80              | 70              | 80              |