
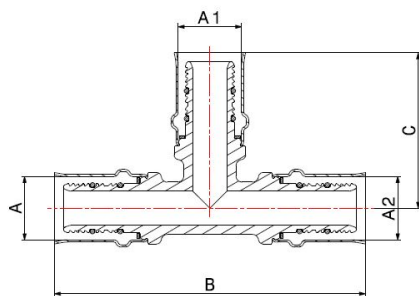


PRESS FITTINGS FOR PEX-AL-PEX PIPES

INTERMEDIATE TEE FITTING

4031



- Intermediate tee press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	6	EPDM Perox
3	Washer	3	PTFE
4	Bushing	3	AISI 304 stainless steel

DIMENSIONS

A	A1	A2	B	C
16	16	16	93	47
16	20	16	100	50
18	16	16	100	50
18	16	18	100	50
18	18	18	100	50
20	16	16	100	50
20	16	20	100	50
20	18	18	100	50
20	18	20	100	50
20	20	16	100	50
20	20	20	100	50

FOLLOWING THE DIMENSIONS FROM 26

PACKAGING

	16 - 16 - 16	16 - 20 - 16	18 - 16 - 16	18 - 16 - 18	18 - 18 - 18	20 - 16 - 16	20 - 16 - 20	20 - 18 - 18	20 - 18 - 20	20 - 20 - 16	20 - 20 - 20
CODE	4031161616	4031162016	4031181616	4031181618	4031181818	4031201616	4031201620	4031201818	4031201820	4031202016	4031202020
PCS BAG	10	5	10	10	10	5	5	5	5	5	5
PCS CARTON	100	80	80	80	80	80	80	70	70	80	50