
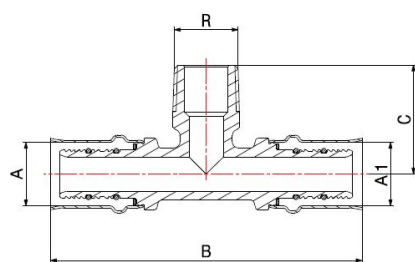


PRESS FITTINGS FOR PEX-AL-PEX PIPES

MALE TEE FITTING

4033



- Male tee press fitting
- Maximum operating pressure 10 bar
- Thread EN 10226-1
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials.

Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS**COMPONENTS**

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	4	EPDM Perox
3	Washer	2	PTFE
4	Bushing	2	AISI 304 stainless steel

DIMENSIONS

A	R	A1	B	C
16	1/2"	16	97	35
16	3/4"	16	97	35
18	1/2"	18	100	35
20	1/2"	20	100	35
20	3/4"	20	100	35
26	3/4"	26	104	43
32	1"	32	110	46

FOLLOWING THE DIMENSIONS FROM 40 TO 50

PACKAGING

	16 - 1/2" - 16	16 - 3/4" - 16	18 - 1/2" - 18	20 - 1/2" - 20	20 - 3/4" - 20	26 - 3/4" - 26	32 - 1" - 32
CODE	4033160416	4033160616	4033180418	4033200420	4033200620	4033260626	4033320832
PCS BAG	5	5	5	5	5	5	2
PCS CARTON	100	80	80	80	50	50	30