
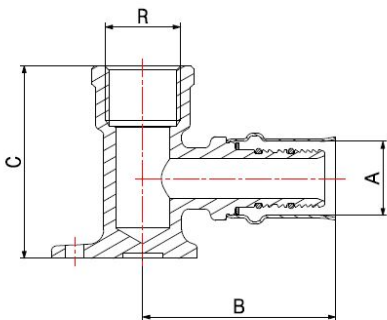


PRESS FITTINGS FOR PEX-AL-PEX PIPES

FEMALE FLANGED ELBOW
FITTING

4054



- Female flanged elbow press fitting
- Maximum operating pressure 10 bar
- Thread EN 10226-1
- Temperature range min 0°C – max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water. The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%. The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS

COMPONENTS			
POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	2	EPDM Perox
3	Washer	1	PTFE
4	Bushing	1	AISI 304 stainless steel

DIMENSIONS			
A	R	B	C
16	1/2"	53	53
18	1/2"	53	53
20	1/2"	53	53
20	3/4"	53	55

PACKAGING

	16 - 1/2"	18 - 1/2"	20 - 1/2"	20 - 3/4"
CODE	40541604	40541804	40542004	40542006
PCS BAG	5	5	5	5
PCS CARTON	80	60	60	60