
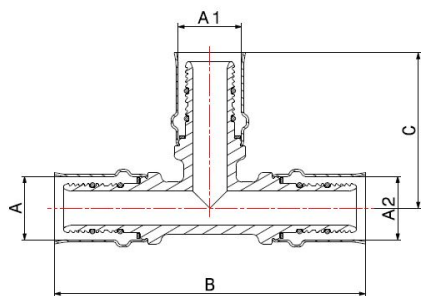


4031



- Intermediate tee press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials.

Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water.

The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%.

The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12165
2	O-Ring	6	EPDM Perox
3	Washer	3	PTFE
4	Bushing	3	AISI 304 stainless steel

DIMENSIONS

A	A1	A2	B	C
26	32	26	112	55
32	20	20	110	55
32	20	26	110	55
32	16	32	110	55
32	18	32	110	55
32	20	32	110	55
32	26	26	110	55
32	26	32	110	55
32	32	32	110	55

FOLLOWING THE DIMENSIONS FROM 40 TO 50

PACKAGING

[illegible]