
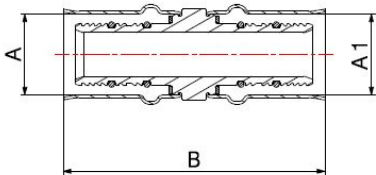


PRESS FITTINGS FOR PEX-AL-PEX PIPES

INTERMEDIATE STRAIGHT FITTING

4003



- Intermediate straight press fitting
- Maximum operating pressure 10 bar
- Temperature range min 0°C - max +95°C
- The jaws for the fittings pressing have to be **TH** profile.

Fitting suitable for distributing fluids that are generally non-corrosive, compatibly with the fitting materials. Heating, plumbing and industrial systems are the ideal fields of application, such as high and low temperature heating systems, air-conditioning and distribution of drinking water. The tightness is guaranteed by two EPDM PEROX O-Rings, particularly recommended with water-glycol solutions, with a maximum glycol presence of 50%. The steel sleeve pressing, carried out with electromechanical tools, ensures a perfect and indivisible crimping to the pipe as well as an excellent resistance to external stress.

ACS

COMPONENTS			
POS.	PART NAME	N°	MATERIAL
1	Fitting	1	CW617N UNI-EN 12164
2	O-Ring	4	EPDM Perox
3	Washer	2	PTFE
4	Bushing	2	AISI 304 stainless steel

DIMENSIONS		
A	A1	B
26	16	66
26	18	66
26	20	66
26	26	66
32	16	66
32	20	66
32	26	66
32	32	66

FOLLOWING THE DIMENSIONS FROM 40 TO 50

PACKAGING

	26 - 16	26 - 20	26 - 26	32 - 16	32 - 20	32 - 26	32 - 32
CODE	40032616	40032620	40032626	40033216	40033220	40033226	40033232
PCS BAG	10	10	10	5	5	5	5
PCS CARTON	100	100	100	60	60	60	50