

STOP VALVES

ANGLE-SEAT VALVE

7480



- F/F angle-seat valve with moving stem
- Female thread EN10226-1
- Temperature range min 0°C - max +95°C

Valve suitable for distributing and interrupting fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing and heating systems and industrial sector are the ideal fields of application.

Valve produced according to German standards DIN 3502 and 3546 SECTION II.


The seat tightness is guaranteed by a EPDM PEROX seal, approved by KTW.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Upper part body	1	CW617N UNI-EN 12164 - CW617N UNI-EN 12165
3	O-Ring	1	KTW approved EPDM Perox
4	Upper part stem	1	CW617N UNI-EN 12164
5	O-Ring	2	KTW approved EPDM Perox
6	Hose end disc	1	CW617N UNI-EN 12164 - CW617N UNI-EN 12165
7	Gasket	1	KTW approved EPDM Perox
8	Washer	1	CW508L UNI-EN 1652
9	Nut	1	CW617N UNI-EN 12164
10	Handwheel	1	Plastic
11	Screw	1	CW508L UNI-EN 12166

DIMENSIONS

DN	A	B	C max	D	E max	PN
15	Rp 1/2"	65	89	50	103	16
20	Rp 3/4"	75	106	55	122	16
25	Rp 1"	90	126	55	146	16
32	Rp 1.1/4"	110	152	70	177	16
40	Rp 1.1/2"	120	175	70	202	16
50	Rp 2"	150	207	70	242	16

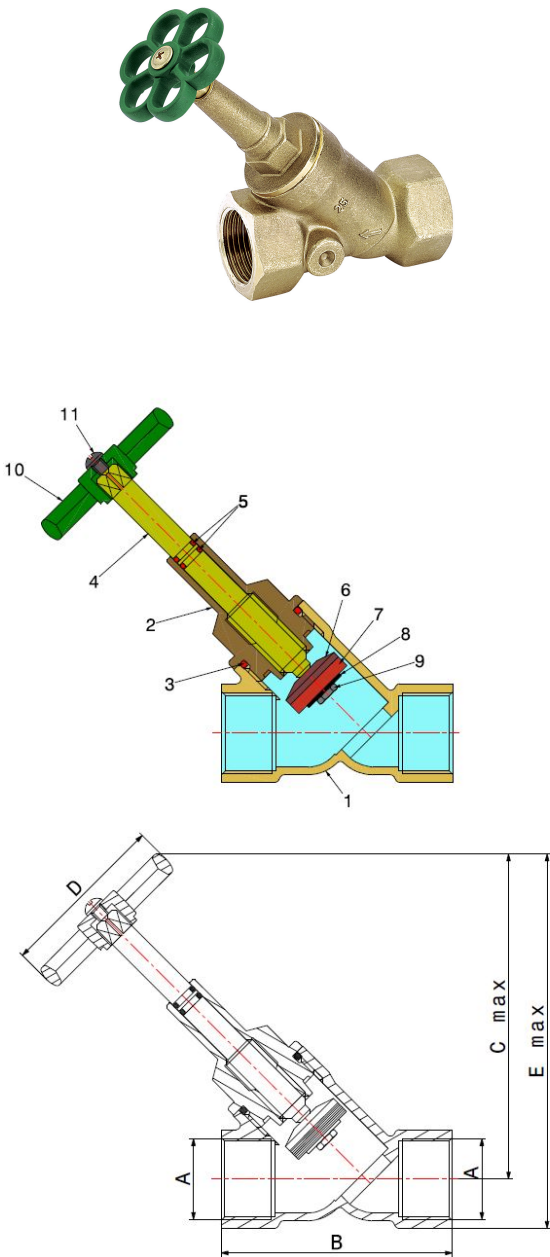

PACKAGING

	Rp 1/2"	Rp 3/4"	Rp 1"	Rp 1.1/4"	Rp 1.1/2"	Rp 2"
CODE	74800004	74800006	74800008	74800010	74800011	74800013
PCS BOX	-	-	-	-	-	-
PCS CARTON	50	40	30	20	15	10