

SWING CHECK VALVES

BRASS SWING CHECK VALVE RUBBER SEAT


700020



- F/F brass swing check valve with rubber seat
- Female/Female thread ISO 228
- Temperature range min 0°C - max +80°C

Valve properly used when it performs a non-return function for fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial, agricultural and pneumatic sectors are the ideal fields of application.

The flow direction is indicated by an arrow on the valve body, while the installation can be in horizontal or vertical position. The seat tightness is guaranteed by a NBR seal.

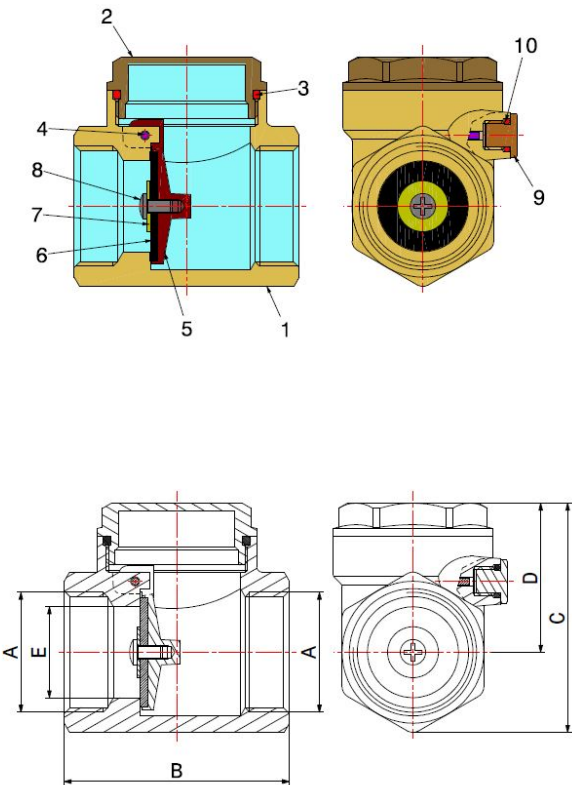

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Cap	1	CW617N UNI-EN 12164 (for 1/2") - CW617N UNI-EN 12165 (from 3/4" to 4")
3	O-Ring	1	NBR
4	Pin	1	CW617N UNI-EN 12164
5	Clapet	1	CW617N UNI-EN 12165
6	Gasket	1	NBR
7	Washer	1	CW508L UNI-EN 1652 (not for 1/2" and 3/4")
8	Screw	1	CW508L UNI-EN 12166
9	M8 cap	1	CW617N UNI-EN 12164
10	O-Ring	1	NBR

DIMENSIONS

DN	A	B	C	D	E	PN
10	3/8"	43	46	25	13	10
15	1/2"	44	46	32	13	10
20	3/4"	52	55	37	17	10
25	1"	62	63	41	25	10
32	1.1/4"	72	76	49	30	8
40	1.1/2"	80	85	54	35	8
50	2"	93	100	60	45	8
65	2.1/2"	118	107	65	55	6
80	3"	135	130	85	70	6
100	4"	164	159	109	90	6

PACKAGING

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	70002003	70002004	70002006	70002008	70002010	70002011	70002013	70002015	70002017	70002019
PCS BOX	-	-	-	-	-	-	-	-	-	-
PCS CARTON	150	150	100	50	30	20	18	20	16	4