

SWING CHECK VALVES



BRASS SWING CHECK VALVE METAL SEAT

700021



- F/F brass swing check valve with metal seat
- Female/Female thread ISO 228
- Temperature range min 0°C - max +80°C

Valve properly used when it performs a non-return function for fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial, agricultural and pneumatic sectors are the ideal fields of application. The flow direction is indicated by an arrow on the valve body, while the installation can be in horizontal or vertical position. The seat tightness is guaranteed by a metal-to-metal seal.

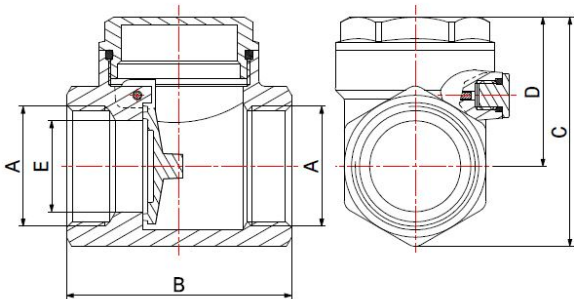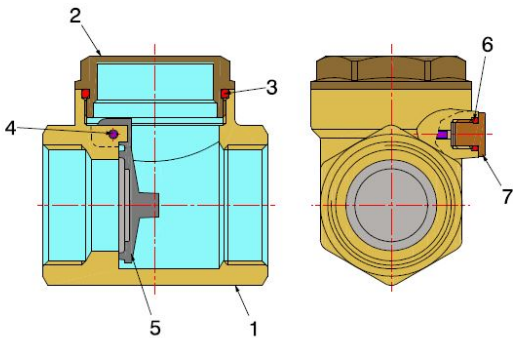

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Cap	1	CW617N UNI-EN 12164 (for 1/2") - CW617N UNI-EN 12165 (from 3/4" to 4")
3	O-Ring	1	NBR
4	Pin	1	CW617N UNI-EN 12164
5	Clapet	1	CW617N UNI-EN 12165
6	M8 Plug	1	CW617N UNI-EN 12164
7	O-Ring	1	NBR

DIMENSIONS

DN	A	B	C	D	E	PN
10	3/8"	43	46	25	13	10
15	1/2"	44	46	32	13	10
20	3/4"	52	55	37	17	10
25	1"	62	63	41	25	10
32	1.1/4"	72	76	49	30	8
40	1.1/2"	80	85	54	35	8
50	2"	93	100	60	45	8
65	2.1/2"	118	107	65	55	6
80	3"	135	130	85	70	6
100	4"	164	159	109	90	6

PACKAGING

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	70002103	70002104	70002106	70002108	70002110	70002111	70002113	70002115	70002117	70002119
PCS BOX	-	-	-	-	-	-	-	-	-	-
PCS CARTON	150	150	100	50	30	20	18	20	16	4