
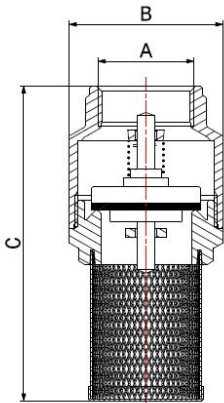


CHECK VALVES

LOIRA WITH STRAINER

1030



- Loira check valve with strainer
- Female thread ISO 228
- Strainer with hole of 1200 micron
- Temperature range min 0°C - max +90°C

Valve properly used when it performs a non-return function for fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial, agricultural and pneumatic sectors are the ideal fields of application.

The flow direction is indicated by an arrow on the valve body, while the installation can be in any position.

The seat tightness is guaranteed by a NBR seal.



COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	Nylon
3	Spring	1	AISI 302 stainless steel
4	Valve	1	Nylon
5	Gasket	1	NBR
6	Filter	1	AISI 304 stainless steel

DIMENSIONS

DN	A	B	C	PN
10	3/8"	34	70	10
15	1/2"	34	81	10
20	3/4"	42	87	10
25	1"	48	97	10
32	1.1/4"	60	110	8
40	1.1/2"	69	125	8
50	2"	85	145	8
65	2.1/2"	102	165	6
80	3"	125	185	6
100	4"	154	215	6

PACKAGING

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10300003	10300004	10300006	10300008	10300010	10300011	10300013	10300015	10300017	10300019
PCS BOX	25	25	15	12	6	4	2	-	-	-
PCS CARTON	250	250	150	120	60	40	20	20	15	10