


CHECK VALVES

EUROPA WITH STRAINER

1020

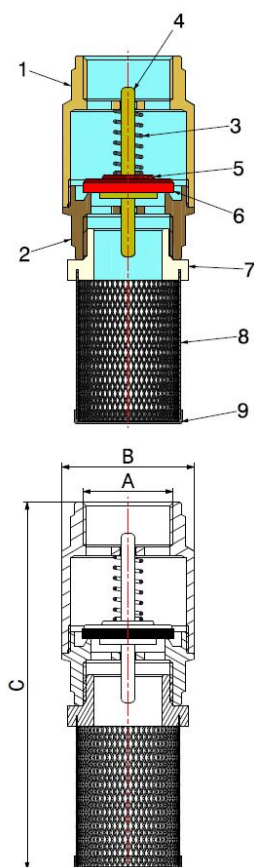

- Europa check valve with strainer
- Female thread ISO 228
- Strainer with hole: from 3/8" to 2" 1200 micron
- Strainer with hole: from 2.1/2" to 4" 2000 micron
- Temperature range min - 20°C - max + 100°C

Valve properly used when it performs a non-return function for fluids that are generally non-corrosive, compatibly with the valve materials. Plumbing, heating, industrial, agricultural and pneumatic sectors are the ideal fields of application.

The flow direction is indicated by an arrow on the valve body, while the installation can be in any position.

The seat tightness is guaranteed by a NBR seal.

COMPONENTS

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	End connection	1	Nylon
3	Spring	1	AISI 302 stainless steel
4	Guide pin	1	CW617N UNI-EN 12164
5	Shutter	1	AISI 304 stainless steel
6	Gasket	1	NBR
7	Filter connection	1	Nylon
8	Filter	1	AISI 304 stainless steel
9	Disk	1	AISI 304 stainless steel

DIMENSIONS

DN	A	B	C	PN
10	3/8"	35	90	25
15	1/2"	35	98	25
20	3/4"	42	114	25
25	1"	48	133	25
32	1.1/4"	61	147	18
40	1.1/2"	71	165	18
50	2"	87	187	18
65	2.1/2"	120	230	12
80	3"	140	265	12
100	4"	173	296	12

PACKAGING

	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
CODE	10200003	10200004	10200006	10200008	10200010	10200011	10200013	10200015	10200017	10200019
PCS BOX	8	8	6	4	4	2	2	-	-	-
PCS CARTON	112	112	84	44	24	14	12	6	3	1