


Vitoni

VITONE VALVOLA ARRESTO

7520AXC

- Vitone per valvole arresto ad asta mobile
- Filettatura maschio ISO 228
- Intervallo di temperatura min 0°C - max +95°C

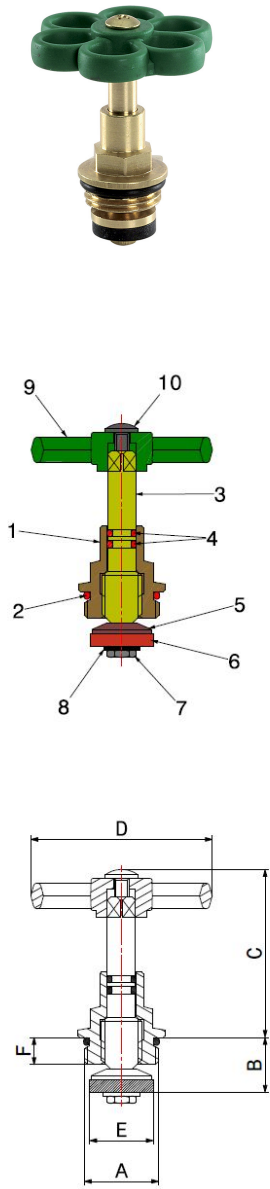

COMPONENTI

POS.	DESCRIZIONE	N°	MATERIALE
1	Corpo vitone	1	CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (da 1" a 2")
2	O-Ring vitone	1	EPDM Perox approvato KTW
3	Vite vitone	1	CW617N UNI-EN 12164
4	O-Ring vite	2	EPDM Perox approvato KTW
5	Disco portagomma	1	CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (da 1" a 2")
6	Guarnizione	1	EPDM Perox approvato KTW
7	Dado	1	CW617N UNI-EN 12164
8	Rondella	1	CW508L UNI-EN 1652
9	Volantino	1	Plastica
10	Vite	1	CW508L UNI-EN 12166

MISURE

A	B min	B max	C min	C max	D	E	F	PN
1/2"	16,5	23	38,5	45	50	17	7,5	16
3/4"	17,5	26	41,5	50	50	22	8,5	16
1"	20	32,5	53,5	64	55	29	10,5	16
1.1/4"	22,5	44,5	70	92	55	37	12	16
1.1/2"	26,5	46	65,5	85	70	42	13	16
2"	25,5	56,5	87	118	70	55	14	16

IMBALLAGGIO

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODICE	7520A004XC	7520A006XC	7520A008XC	7520A010XC	7520A011XC	7520A013XC
PZ SCATOLA	-	-	-	-	-	-
PZ CARTONE	200	150	150	50	40	30