


Vitoni

VITONE DIN 3502

7480XC



- Vitone conforme a norma DIN 3502 ad asta mobile
- Filettatura maschio ISO 228
- Intervallo di temperatura min 0°C - max +95°C

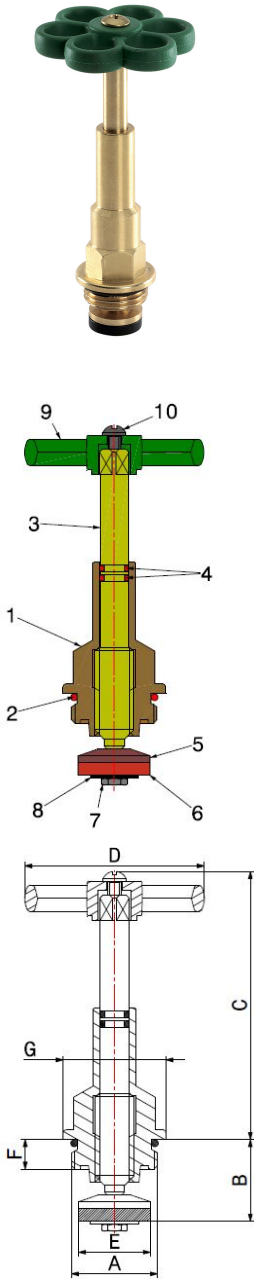

COMPONENTI

POS.	DESCRIZIONE	N°	MATERIALE
1	Corpo vitone	1	CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (da 1" a 2")
2	O-Ring vitone	1	EPDM Perox approvato KTW
3	Vite vitone	1	CW617N UNI-EN 12164
4	O-Ring vite	2	EPDM Perox approvato KTW
5	Disco portagomma	1	CW617N UNI-EN 12164 (1/2"-3/4") - CW617N UNI-EN 12165 (da 1" a 2")
6	Guarnizione	1	EPDM Perox approvato KTW
7	Dado	1	CW617N UNI-EN 12164
8	Rondella	1	CW508L UNI-EN 1652
9	Volantino	1	Plastica
10	Vite	1	CW508L UNI-EN 12166

MISURE

A	B min	B max	C min	C max	D	E	F	G	PN
1/2"	19	35	58	74	50	17	8	25,5	16
3/4"	24	43	64	83	55	22	9	31,5	16
1"	27	52	76	101	55	29	10,5	39,5	16
1.1/4"	31	63	89	121	70	37	12	49	16
1.1/2"	32	72	105	145	70	42	13	56	16
2"	40	90	126	176	70	55	14	68	16

IMBALLAGGIO

	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
CODICE	74800004XC	74800006XC	74800008XC	74800010XC	74800011XC	74800013XC
PZ SCATOLA	-	-	-	-	-	-
PZ CARTONE	250	175	80	50	40	30