
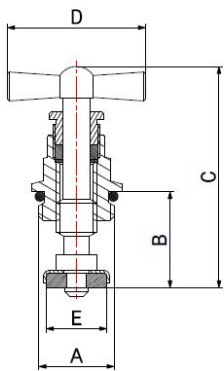


UPPER PARTS

UPPER PART MOVING STEM

2490

- Upper part - moving stem with lever
- Male thread ISO 228
- Temperature range min 0°C - max +95°C

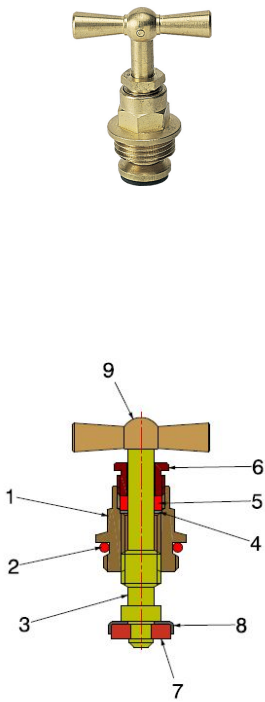

COMPONENTS

| POS. | PART NAME          | N° | MATERIAL                                                      |
|------|--------------------|----|---------------------------------------------------------------|
| 1    | Upper part body    | 1  | CW617N UNI-EN 12164                                           |
| 2    | Upper part gasket  | 1  | For 1/2" O-Ring gasket in NBR - For 3/8" flat gasket in fiber |
| 3    | Screw              | 1  | CW617N UNI-EN 12164                                           |
| 4    | Washer             | 1  | CW508L UNI-EN 1652                                            |
| 5    | Gasket screw       | 1  | NBR                                                           |
| 6    | Gland              | 1  | CW617N UNI-EN 12164                                           |
| 7    | Gasket             | 1  | NBR                                                           |
| 8    | Gasket holder disc | 1  | AISI 304 stainless steel (only 1/2")                          |
| 9    | Lever              | 1  | CW617N UNI-EN 12164                                           |

DIMENSIONS

| A    | B min | B max | C  | D  | E  | PN |
|------|-------|-------|----|----|----|----|
| 3/8" | 9     | 16    | 52 | 38 | 13 | 16 |
| 1/2" | 16,5  | 27    | 60 | 38 | 16 | 16 |

PACKAGING

|            |          |          |
|------------|----------|----------|
|            | 3/8"     | 1/2"     |
| CODE       | 24900003 | 24900004 |
| PCS BOX    | -        | -        |
| PCS CARTON | 500      | 400      |